

CEMWASH

Rough textured cement wall finish

A two-coat decorative, coloured, weatherproof cement finish; supplied as CemWash first coat grey and CemWash top coat in the colour of your choice. Having a base of Portland cement, it sets rock-hard, is UV resistant, economical and extremely durable. The purpose is to provide a tough, durable cement-based coating directly to brick, block or hard cured plaster walls

Creating distinctive cement finishes
as *unique* as you are.

CEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings




Did you know

CemWash is popular for coating directly over brickwork, allowing the bricks' shape to remain visible, giving the finish depth and texture. It also carries the Agrément Certificate for building materials in South Africa.

CemWash Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

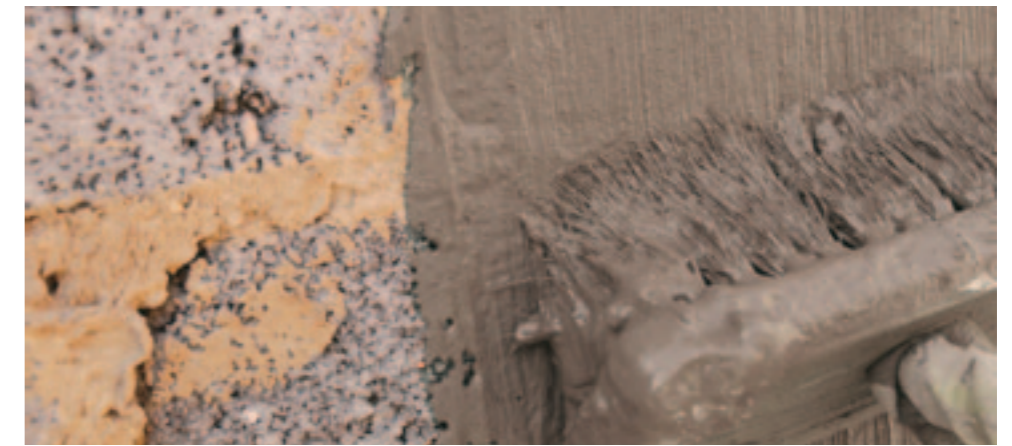

Benefits

- Interior and exterior use
- Easy brush-on application
- Textured finish
- Resistant to water penetration
- Wears well over time
- Extremely durable & UV resistant
- Can be applied directly to brickwork to reduce the cost of plastering and then painting
- 3-in-1 brush finish (plaster, paint and weatherproofing)



Specifications

Suitable Surfaces	Interior and exterior walls
Finish	Rough texture
Thickness	Min application thickness – 0.5mm Max application thickness – 0.7mm
Application	Brush-on or spray-on
Packaging	25kg paper bags
Coverage	CemWash first coat grey: Approximately 15-17m ² per 25kg bag CemWash top coat colour: Approximately 22-26m ² per 25kg bag
Curing	Each coat to be cured by wetting with clean water 3 times during the day following the day of application. Cure from bottom to top to avoid water run marks and colour variations.
Colour/s	First coat grey available in grey only CemWash is available in 18 colours

Intended for use with

CemBond	1, 5 & 20 litre plastic containers – mixed 1:3 with water to prime the wall 8m ² / L for 2 coats
CemBond	1, 5 & 20 litre plastic containers - mixed 1:5 with water to mix the first coat of CemWash - 2L per bag of CemWash first coat grey

Tools needed

Mechanical mixer
Block brush or broom or Hopper gun (3mm nozzle setting) and a compressor with a minimum capacity of 120 litre
Mist Sprayer

Supporting Cemcrete Products

SiliconSeal
Concrete Sealer



White



Light Grey



Grey



Sandstone



Wheat



Clarence



Cinnamon



Nutmeg



Albany



Ivory



Ochre



Khaki



Hazelnut



Green



Slate



Kalahari



Peach




Golden Brown



CemWash Sandstone

This page & opposite page

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

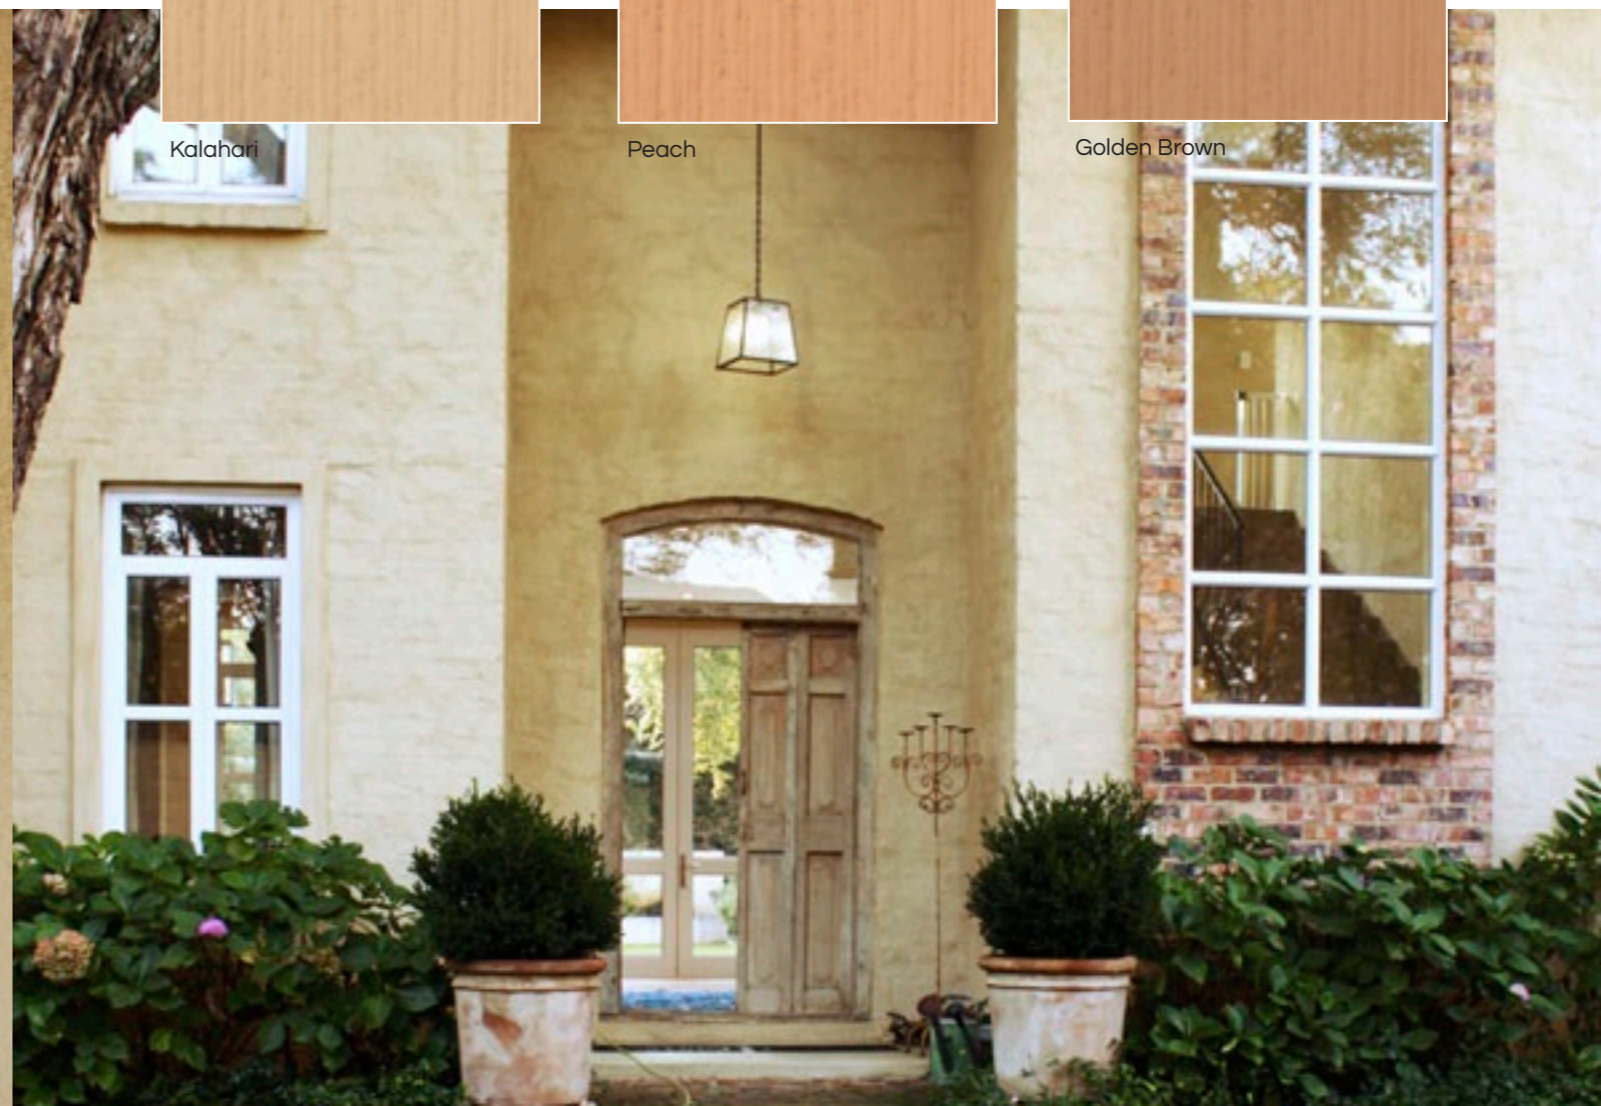

0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



blog.cemcrete.co.za

HEAD OFFICE

Showroom & Warehouse

8 Telford Street

Industria

(011) 474 2415

info@cemcrete.co.za

GAUTENG

Johannesburg Showroom

227 Jan Smuts Avenue

Parktown North

(011) 447 3149

jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park

26 Jakaranda Street

Centurion

(012) 653 6808

pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse

Unit 3 Eagle Park

cnr Bosmansdam & Omuramba Roads

Montague Gardens

(021) 555 1034

cape@cemcrete.co.za

We have distributors nationally, in most African countries and internationally. Contact us to locate your nearest stockist or contractor.

CEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings



On the cover:
CemWash Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of pool and exposure to sunlight might also affect the final colour.