

# CEMWASH

Rough textured cement wall finish

---

A two-coat decorative, coloured, weatherproof cement finish; supplied as CemWash first coat grey and CemWash top coat in the colour of your choice. Having a base of Portland cement, it sets rock-hard, is UV resistant, economical and extremely durable. The purpose is to provide a tough, durable cement-based coating directly to brick, block or hard cured plaster walls



Creating distinctive cement finishes  
as *unique* as you are.

**CEMCRETE**<sup>®</sup>

Manufacturers of Distinctive Decorative Coatings




*Did you know*

CemWash can be used to create a German Schmeear effect on exposed brickwork.

CemWash German Schmeear effect in a custom colour

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

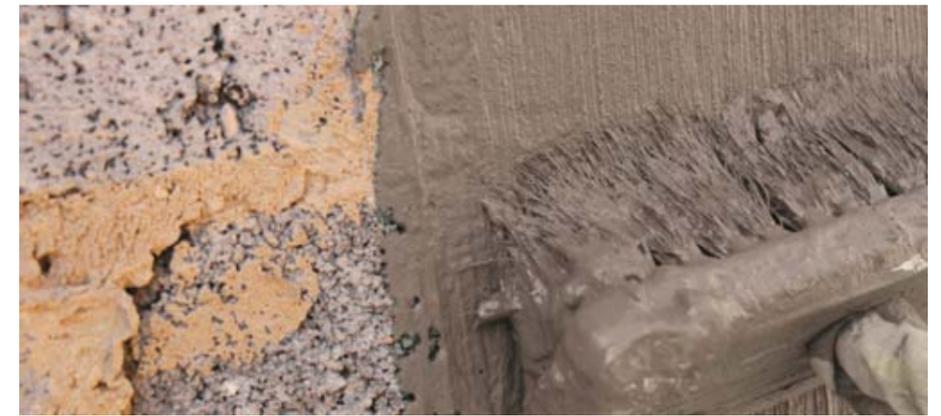

**Benefits**

- Interior and exterior use
- Easy brush-on application
- Textured finish
- Resistant to water penetration
- Wears well over time
- Extremely durable & UV resistant
- Can be applied directly to brickwork to reduce the cost of plastering and then painting
- 3-in-1 brush finish (plaster, paint and weatherproofing)



**Specifications**

Suitable Surfaces	Interior and exterior walls
Finish	Rough texture
Thickness	Min application thickness – 0.5mm Max application thickness – 0.7mm
Application	Brush-on or spray-on
Packaging	25kg paper bags
Coverage	CemWash first coat grey: Approximately 15-17m <sup>2</sup> per 25kg bag CemWash top coat colour: Approximately 22-26m <sup>2</sup> per 25kg bag
Curing	Each coat to be cured by wetting with clean water 3 times during the day following the day of application. Cure from bottom to top to avoid water run marks and colour variations.
Colour/s	First coat grey available in grey only CemWash is available in 18 colours

**Intended for use with**

- CemBond 1, 5 & 20 litre plastic containers – mixed 1:3 with water to prime the wall 8m<sup>2</sup>/ L for 2 coats
- CemBond 1, 5 & 20 litre plastic containers - mixed 1:5 with water to mix the first coat of CemWash - 2L per bag of CemWash first coat grey

**Tools needed**

- Mechanical mixer
- Block brush or broom or Hopper gun (3mm nozzle setting) and a compressor with a minimum capacity of 120 litre
- Mist Sprayer

**Supporting Cemcrete Products**

- SiliconSeal
- Concrete Sealer



White



Light Grey



Grey



Sandstone



Wheat



Clarence



Cinnamon



Nutmeg



Albany



Ivory



Ochre



Khaki



Hazelnut




Green



Slate



Kalahari

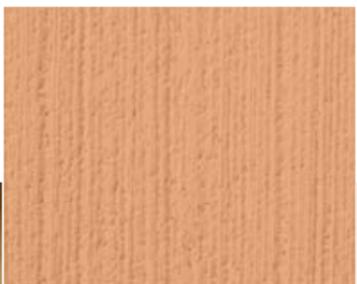

Peach




Golden Brown



CemWash Sandstone

This page & opposite page

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

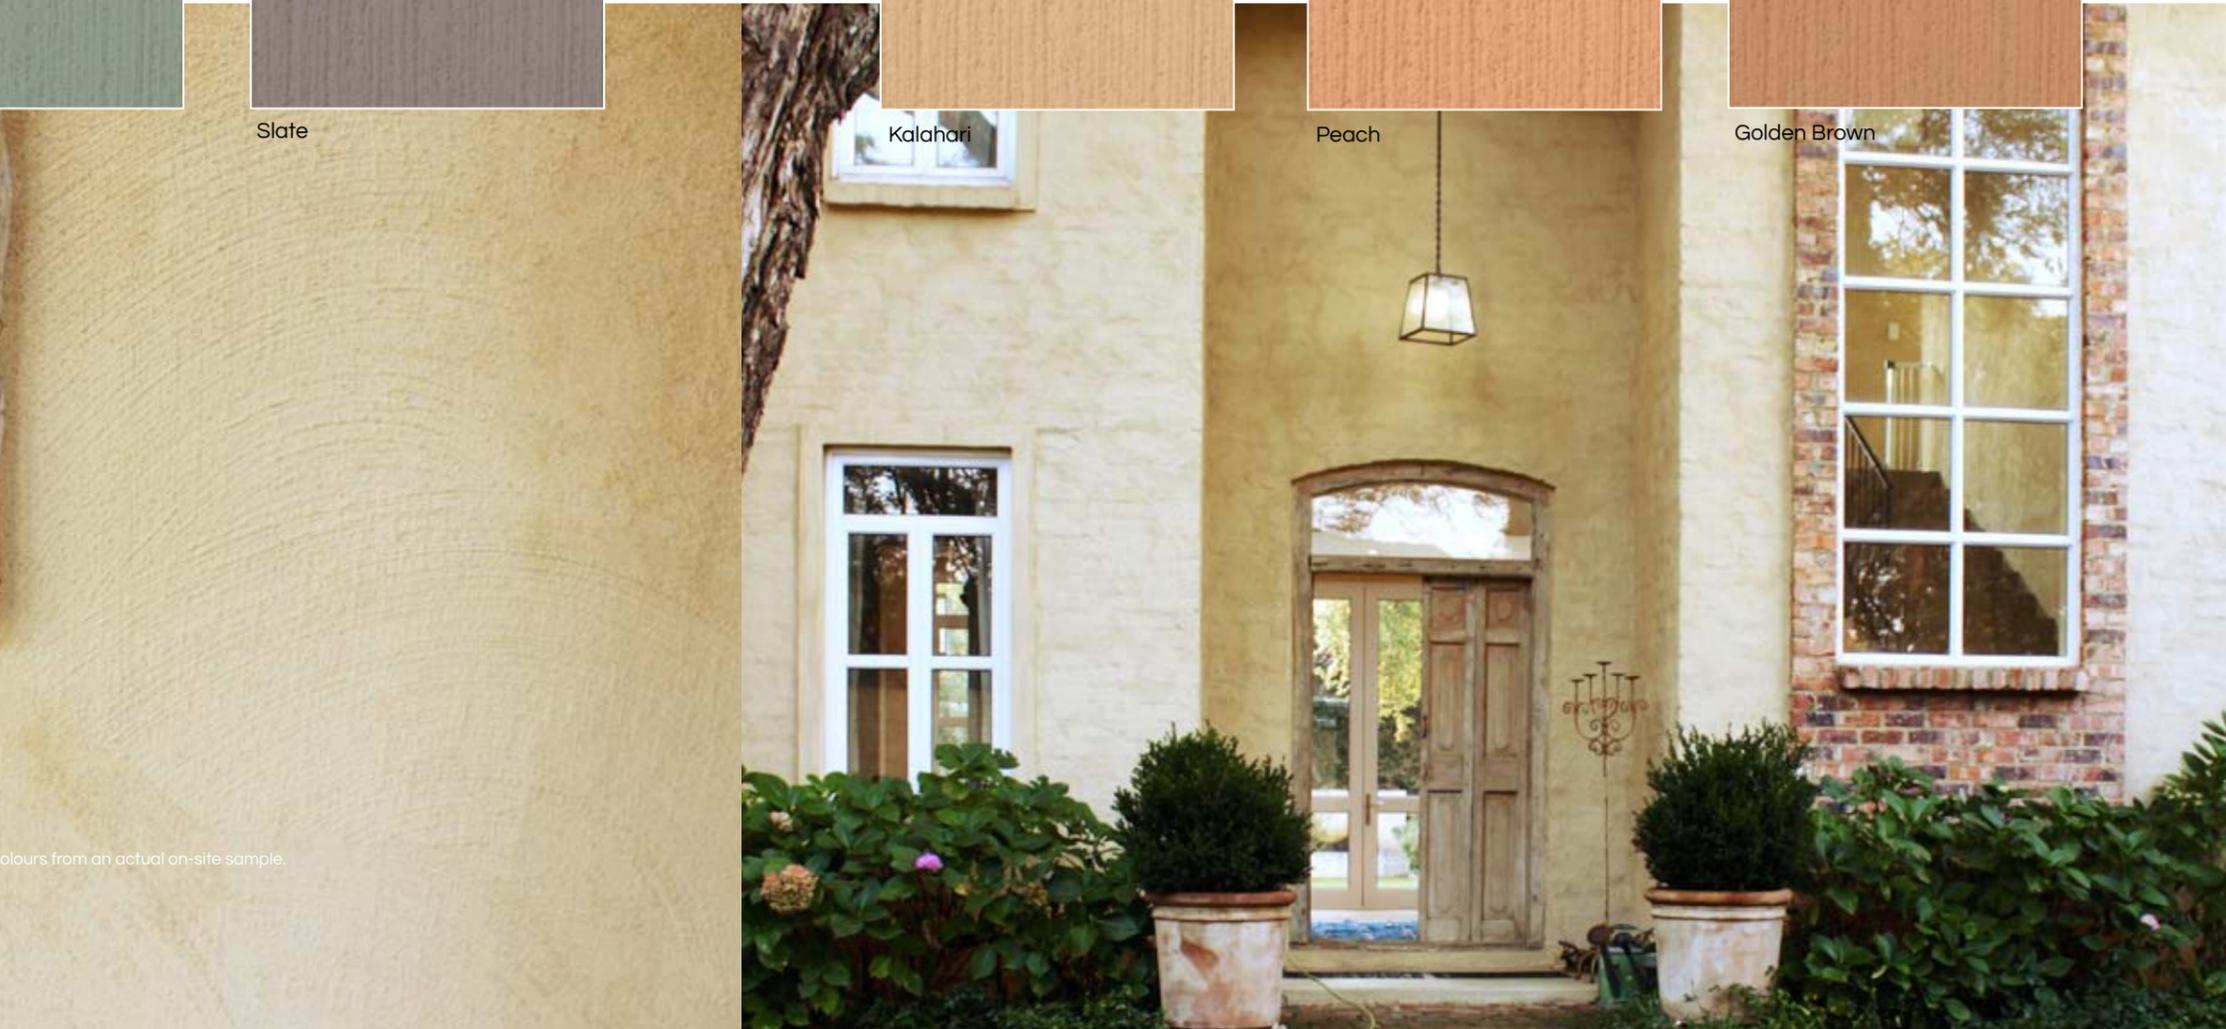

# 0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



blog.cemcrete.co.za

## HEAD OFFICE

---

### Showroom & Warehouse

8 Telford Street  
Industria  
(011) 474 2415  
info@cemcrete.co.za

## GAUTENG

---

### Johannesburg Showroom

227 Jan Smuts Avenue  
Parktown North  
(011) 447 3149  
jsa@cemcrete.co.za

### Centurion Showroom & Warehouse

15 Coachmen's Park  
26 Jakaranda Street  
Centurion  
(012) 653 6808  
pretoria@cemcrete.co.za

## CAPE TOWN

---

### Showroom & Warehouse

Unit 3 Eagle Park  
cnr Bosmansdam & Omuramba Roads  
Montague Gardens  
(021) 555 1034  
cape@cemcrete.co.za

We have distributors nationally, in most African countries and internationally. Contact us to locate your nearest stockist or contractor.



Manufacturers of Distinctive Decorative Coatings



On the cover:  
CemWash Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of pool and exposure to sunlight might also affect the final colour.