

POOL COATING

Brush-on cement-based pool paint

A cement-based coating which can be applied easily and quickly using a paint brush. Pool Coating is intended to revitalise your old, pitted, dirty pool plaster as an alternative to re-plastering. It must be noted that Pool Coating is a once-off application.

Creating distinctive cement finishes
as *unique* as you are.


ICEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings



Pool Coating Blue


The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.

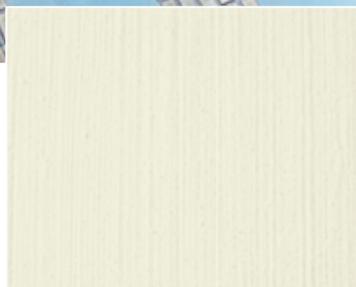

White



Sandstone

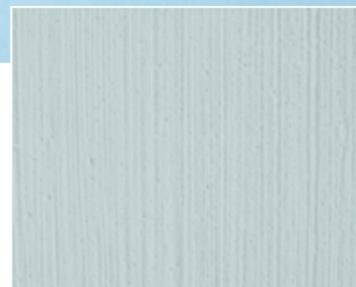

Blue



Turquoise



Green



Charcoal



Benefits

- Application with a brush and/or roller
- Economical & easy to apply
- Fresh finish to old surfaces
- Excellent bond, flexural and tensile strength
- Good abrasion and chemical resistance
- Becomes an integral part of the pool plaster

Specifications

Suitable Surfaces	Old, dirty pool plaster that has been acid-washed. Not for application to oil paint, plastic paint, new cement surfaces, fibreglass or new pool plaster.
Finish	Smooth - slight brush/roller texture
Thickness	1.5mm
Application	Brush and/or roller
Packaging	15kg twin pack
Coverage	Approximately 25m ² per 15kg twin pack
Curing	The completed work should be air cured for 6 days before filling the pool with water. Any rain water that does fall during this period should be immediately removed from the pool. Allow an extra day's air curing for each day of rain during the six day curing period. Filling of pool - See Pool Coating Start-Up Guide
Colour/s	Available in 6 colours

Intended for use with
None

Tools needed

- Block brush
- Wire-brush
- Brush and/or roller

Supporting Cemcrete Products

- Pool Crack Filler Fibre-reinforced flexible paste crack filler
- Pool Sealer Liquid sealer for treating leaking pools
- Pool Patching Underwater patching of holes in plaster pools
- FlexBond In warm/humid weather the product tends to thicken in the drum which reduces the coverage achieved. To alleviate this problem, dilute FlexBond (dilute 1:4 with clean water) and add 100ml at a time to keep the mixed product to a paintable consistency.

0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



blog.cemcrete.co.za

HEAD OFFICE

Showroom & Warehouse

8 Telford Street

Industria

(011) 474 2415

info@cemcrete.co.za

GAUTENG

Johannesburg Showroom

227 Jan Smuts Avenue

Parktown North

(011) 447 3149

jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park

26 Jakaranda Street

Centurion

(012) 653 6808

pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse

Unit 3 Eagle Park

cnr Bosmansdam & Omuramba Roads

Montague Gardens

(021) 555 1034

cape@cemcrete.co.za

We have distributors nationally, in most African countries and internationally. Contact us to locate your nearest stockist or contractor.

CEMCRETE®

Manufacturers of Distinctive Decorative Coatings

On the cover:
Pool Coating Blue

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.