

# POOL COATING

Brush-on cement-based pool paint

---

A cement-based coating which can be applied easily and quickly using a paint brush. Pool Coating is intended to revitalise your old, pitted, dirty pool plaster as an alternative to re-plastering. It must be noted that Pool Coating is a once-off application.

Creating distinctive cement finishes  
as *unique* as you are.

**ICEMCRETE®**


Manufacturers of Distinctive Decorative Coatings






Pool Coating Blue


The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.

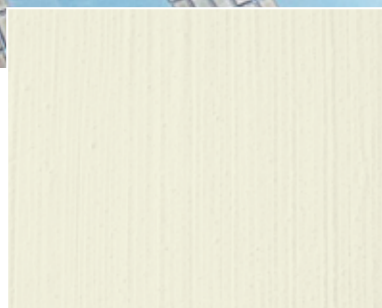

White

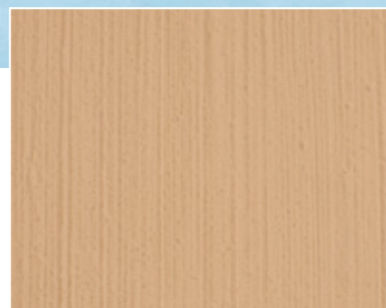

Sandstone

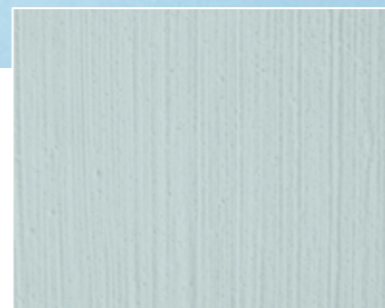


Blue



Turquoise



Green

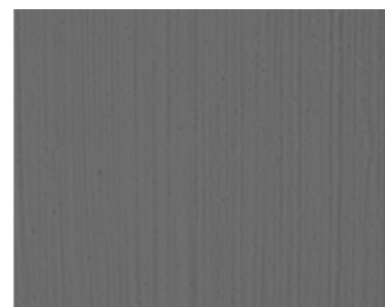

Charcoal



### Benefits

- Application with a brush and/or roller
- Economical & easy to apply
- Fresh finish to old surfaces
- Excellent bond, flexural and tensile strength
- Good abrasion and chemical resistance
- Becomes an integral part of the pool plaster

### Specifications

|                   |   |
|-------------------|---|
| Suitable Surfaces | Old, dirty pool plaster that has been acid-washed.<br>Not for application to oil paint, plastic paint, new cement surfaces, fibreglass or new pool plaster.   |
| Finish            | Smooth - slight brush/roller texture  |
| Thickness         | 1.5mm   |
| Application       | Brush and/or roller   |
| Packaging         | 15kg twin pack  |
| Coverage          | Approximately 25m <sup>2</sup> per 15kg twin pack   |
| Curing            | The completed work should be air cured for 6 days before filling the pool with water.<br>Any rain water that does fall during this period should be immediately removed from the pool.<br>Allow an extra day's air curing for each day of rain during the six day curing period.<br>Filling of pool - See Pool Coating Start-Up Guide |
| Colour/s          | Available in 6 colours  |

Intended for use with  
None

Tools needed  
Block brush  
Wire-brush  
Brush and/or roller

### Supporting Cemcrete Products

|                   |  |
|-------------------|--|
| Pool Crack Filler | Fibre-reinforced flexible paste crack filler   |
| Pool Sealer       | Liquid sealer for treating leaking pools   |
| Pool Patching     | Underwater patching of holes in plaster pools  |
| FlexBond          | In warm/humid weather the product tends to thicken in the drum which reduces the coverage achieved. To alleviate this problem, dilute FlexBond (dilute 1:4 with clean water) and add 100ml at a time to keep the mixed product to a paintable consistency. |

**0860 CEMCRETE**

**info@cemcrete.co.za**

**www.cemcrete.co.za**



**blog.cemcrete.co.za**

## HEAD OFFICE

---

### Showroom & Warehouse

8 Telford Street

Industria

(011) 474 2415

info@cemcrete.co.za

## GAUTENG

---

### Johannesburg Showroom

227 Jan Smuts Avenue

Parktown North

(011) 447 3149

jsa@cemcrete.co.za

### Centurion Showroom & Warehouse

15 Coachmen's Park

26 Jakaranda Street

Centurion

(012) 653 6808

pretoria@cemcrete.co.za

## CAPE TOWN

---

### Showroom & Warehouse

Unit 3 Eagle Park

cnr Bosmansdam & Omuramba Roads

Montague Gardens

(021) 555 1034

cape@cemcrete.co.za

We have distributors nationally, in most African countries and internationally. Contact us to locate your nearest stockist or contractor.

**CEMCRETE®**

Manufacturers of Distinctive Decorative Coatings

On the cover:  
Pool Coating Blue

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.